

Closer to the music.

9X Series · Build your listening system

Seven components. Flexible choices. One musical vision.



STA-9X

Stereo power that grows into a dedicated mono amplifier for each speaker.

IDA-9 · IA-9XG

Integrated amplification: choose digital versatility or analogue listening with configurable MM phono.

DAC-9X

Dual ESS conversion, precise preamp control and a capable headphone output.

PRA-9X

Fully balanced analogue control, flexible MM phono and headphone listening.

Stream 9X · CDT-9

Two routes to your DAC: connected network streaming and precision CD playback.

Technology

Engineering you can hear.

Purposeful design across power, analogue control and digital playback.

ANC GaN power

IDA-9 · IA-9XG

Active noise cancellation, power-factor correction and dual symmetrical supply rails support fast, stable energy delivery for musical peaks.

ODC + harmonic mode

IA-9XG

Only Distortion Cancellation reduces output-stage errors. A selectable harmonic mode offers neutral or warmer character.

Class-A + Class-D

IDA-9 · STA-9X

Class-A input stages meet efficient Class-D output. STA-9X switches at 750kHz and can bridge to mono.

Clarity

Reveal the recording

Control

Shape your system

Power

Support the dynamics

Analogue precision

PRA-9X · IA-9XG

Balanced analogue control in PRA-9X and configurable two-stage MM phono circuitry in both models preserve listening flexibility.

Dual ESS conversion

DAC-9X

Two ESS9028Q2M chips provide independent left and right conversion, alongside precise analogue volume control.

Digital precision

Stream 9X · CDT-9

Selectable SRC and flexible digital outputs match your DAC. Upsampling changes output rate, not original source resolution.

IDA-9

Power. Detail. Simplicity.

A compact integrated amplifier with a high-resolution DAC, bringing analogue sources and digital listening together with confident speaker control.



INTEGRATED AMPLIFIER / DAC · FRONT VIEW

200W × 2

RMS at 8Ω

250W × 2

RMS at 4Ω

DSD256

PCM up to 384kHz

Feel the energy

An ANC GaN power supply with dual-phase PFC provides fast, stable power for musical peaks.

Hear the nuance

A Class-A ULCAM input stage and 600kHz Class-D output combine fine detail with efficient power.

Simplify your system

A built-in DAC and 99-step volume control put source selection and listening level in one component.

CONNECTIONS · REAR VIEW



235 × 281 × 55 mm (W × D × H) · 4 kg · Black / Silver

IA-9XG

Your music. Your character.

An analogue integrated amplifier with configurable MM phono and selectable harmonic character, powered by an ANC GaN supply.



ANALOGUE INTEGRATED AMPLIFIER · FRONT VIEW

170W × 2

RMS at 8Ω

200W × 2

RMS at 4Ω

MM phono

Adjustable loading

Choose your tone

Only Distortion Cancellation (ODC) reduces output-stage errors. Select neutral sound or added even-order harmonics.

Power the performance

The ANC GaN supply combines active noise cancellation, power-factor correction and symmetrical rails for responsive energy delivery.

Bring vinyl to life

Two-stage RIAA equalisation and adjustable resistance and capacitance help match your moving-magnet cartridge.

CONNECTIONS · REAR VIEW



MM phono • 2 RCA inputs • XLR input • Speaker outputs • Trigger in / out

235 × 281 × 61 mm (W × D × H) · 2.5 kg

DAC-9X

Discover what is in the recording.

A versatile DAC, preamplifier and headphone amplifier with dual ESS conversion and flexible digital connections.



DAC / PREAMPLIFIER · FRONT VIEW

Dual ESS

9028Q2M DAC chips

PCM / DSD

Up to 384kHz / DSD256

1.7W / ch

Headphones at 32Ω

Reveal the detail

Independent ESS DAC chips handle the left and right channels, supporting clear separation and precise imaging.


Set the level precisely

Dual-mono analogue shunt volume control and source-level matching make it easy to balance different inputs.

Listen your way

Connect a power amplifier through XLR or RCA, or enjoy headphones from the front 6.3mm socket.

CONNECTIONS · REAR VIEW

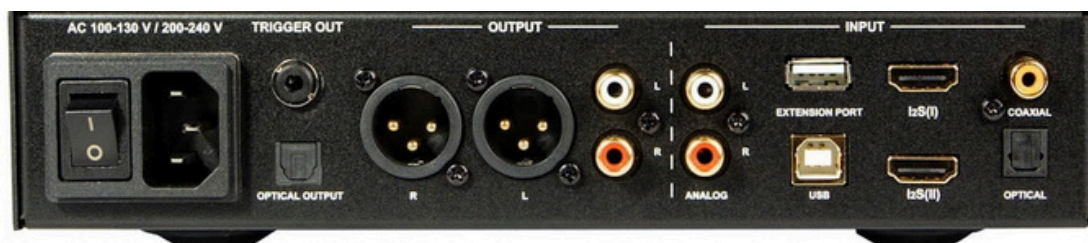

USB • Coaxial • Optical • Extension port • RCA input • XLR Speaker output • RCA Headphones

235 × 281 × 55 mm (W × D × H) · 3 kg · Black / Silver

STA-9X

Power that grows with you.

A compact stereo power amplifier with a bridgeable mono mode, combining Class-A character with Class-D speed and control.



STEREO / MONO POWER AMPLIFIER · FRONT VIEW

130W × 2

Stereo RMS at 8Ω / 4Ω

330W

Mono RMS at 8Ω / 4Ω

750kHz

Class-D switching

Preserve natural tone

A single-ended Class-A input stage and enhanced even-order harmonics support a rich, spacious presentation.

Deliver the dynamics

Dual-feedback Class-D circuitry and a toroidal linear power supply provide responsive speaker drive.

Expand your system

Start with one amplifier in stereo, then use two in bridged mono for dedicated power to each speaker.

CONNECTIONS · REAR VIEW



RCA or XLR inputs • Speaker binding posts • Stereo / mono switch • Trigger in / out

235 × 281 × 55 mm (W × D × H) · 4 kg · Black / Silver

PRA-9X

Control with clarity.

A fully balanced analogue preamplifier with configurable MM phono, precise volume adjustment and a dedicated headphone output.



BALANCED PREAMPLIFIER · FRONT VIEW

Fully balanced

4-channel volume control

0.0004%

Ultra-low distortion

MM phono

Adjustable loading

Keep the signal balanced

Separate L+, L-, R+ and R- volume paths preserve balanced operation through the preamplifier.

Connect with confidence

MUSES8820 circuitry and current-boost modules support low distortion and high driving force, with RCA, XLR and headphone outputs.

Enjoy your records

Two-stage RIAA circuitry and cartridges matching bring flexible vinyl playback to your system.

CONNECTIONS · REAR VIEW



MM phono • 2 RCA inputs • XLR input • RCA / XLR outputs • 6.3mm headphones • Trigger

235 × 281 × 55 mm (W × D × H) · 3 kg

CDT-9

Rediscover your CD collection.

A dedicated CD transport combining precise disc reading and flexible digital outputs for a carefully matched DAC system.



CD TRANSPORT · FRONT VIEW

Red Book

Dedicated CD playback

768kHz & DoP256

Selectable PCM SRC up to

Outputs

Coaxial, Optical, I²S, AES/EBU

Read with precision

A single-speed mechanism, DSP error correction and a controlled master clock support reliable CD playback.

Explore sample rates

Selectable SRC converts CD audio to higher output rates; the original disc remains CD resolution.

Match your DAC

Choose optical, coaxial, AES/EBU or I²S outputs to suit your converter. I²S uses HDMI connectors with compatible DACs.

CONNECTIONS · REAR VIEW



Optical • Coaxial • AES/EBU • I²S digital outputs • DC power input

235 × 281 × 55 mm (W × D × H) · 4 kg

Stream 9X

Your collection. Everywhere.

A network streaming transport connecting favourite services and local music to your external DAC, with flexible multi-room playback.



NETWORK STREAMING TRANSPORT · FRONT VIEW

WiFi & BT 5.0

24-bit/192kHz & aptX HD

Format

AirPlay 2 · Google Cast · Roon Ready

768kHz or DoP256

Selectable SRC up to

Stream with freedom

Qobuz Connect, Spotify Connect, TIDAL Connect and Internet Radio join DLNA and Bluetooth 5.0 aptX HD for flexible listening.

Choose your conversion

Selectable SRC reaches PCM 768kHz or DSD256 on compatible outputs. Conversion does not change source resolution.

Build a connected home

The Libre Orbit Mini platform, Go Control app and low-noise linear supply support convenient network listening.

CONNECTIONS · REAR VIEW



Ethernet / Wi-Fi • Optical / coax inputs • I²S, AES/EBU, optical / coax outputs • Trigger out

235 × 281 × 55 mm (W × D × H) · 4 kg